
LONG HAUL COHERENT QPSK TRANSMISSION OF 40G CHANNELS WITH 120% SPECTRAL EFFICIENCY USING INCREASED LINEARITY DISPERSION MAP WITH 100KM SPANS AND EDFAs

D. G. Foursa, Y. Cai, C. R. Davidson, J.-X. Cai, O. Sinkin, A. Lucero, W. Anderson, M. Nissov, A. Pilipetskii, and Neal. S. Bergano

Email: <dfoursa@tycotelecom.com>

Tyco Electronics Subsea Communications LLC, 250 Industrial Way West, Eatontown NJ 07724, USA

Abstract: We study transmission of 40 Gb/s signals using coherent RZ-QPSK at 10 and 20 Gbaud utilizing 100km spans of large effective area fiber-spans with mid-stage dispersion compensation in dual-stage EDFAs and compare different coherent detection schemes.

1. INTRODUCTION

The high spectral efficiency that is needed for the next generation of optical communications systems is particularly difficult to achieve in transoceanic length undersea cable systems. This is especially true for a spectral efficiency greater than 100%. In addition to the noise limited performance, long-haul systems are impaired by the non-linear transmission properties of the fiber. In previous experiments over transoceanic distance spectral efficiency of 80% was demonstrated using coherent PDM-BPSK [1]. Later 200% and 370% were achieved using coherent PDM-QPSK and PDM-OFDM-QPSK [2-4]. Distributed Raman amplification was used in these high spectral efficiency experiments to reduce noise accumulation and extend transmission distance. In our work we have investigated 40 Gb/s transmission with coherent receiver using single polarization 20 Gbaud and 10 Gbaud PDM-RZ-QPSK carriers launched at 33 GHz frequency spacing. We have demonstrated spectral efficiency of 120% over a distance of 7,200 km using an "EDFA only" amplifier chain with 100 km large effective area fiber spans. Dispersion

management was done by placing dispersion compensating modules in between the stages of dual-stage amplifier. This configuration is similar to that commonly used in terrestrial systems and it improves system noise performance and linearity [5] relative to more traditional fiber spans with positive and negative dispersion slope compensating fibers. We tested the performance of the coherent receiver with absolute phase detection without differential coding (QPSK) and with differential coding (DC-QPSK), and differential phase detection (DQPSK). Using the absolute phase detection scheme without differential coding, i.e. QPSK, the achieved performance was near theoretical OSNR sensitivity limit. However this scheme may suffer from cycle slips induced by accumulated signal phase wandering discussed in details in [6]. The use of differential schemes, i.e. DC-QPSK and DQPSK, allows to avoid the cycle slip problem at the expense of receiver sensitivity degradation [7]. We have found that the coherent DQPSK receiver provides the lowest OSNR sensitivity but the best nonlinear tolerance, which confirmed previous simulation results in [8].

2. EXPERIMENTAL SETUP

Figure 1(a-c) shows the schematics of the 40G coherent RZ-QPSK experiment. The single polarization 23 Gbaud transmitter consists of two pre-filtered and orthogonally combined modulation paths; even channels go through one, odd through the other (Figure 1a). Pre-filtering and orthogonal combining are performed simultaneously using a 33 GHz optical interleaving filter. The single polarization RZ-QPSK signals are created using a combination of I&Q data modulator and MZ modulator for the RZ. The two modulation paths are operated with $2^{23}-1$ data and inverted data patterns at 23 Gbaud, corresponding to a 15% FEC rate. Figure 1b shows 11.5 Gbaud RZ-QPSK transmitter with polarization division multiplexing (PDM). It also contains separate odd and even channel modulation paths.

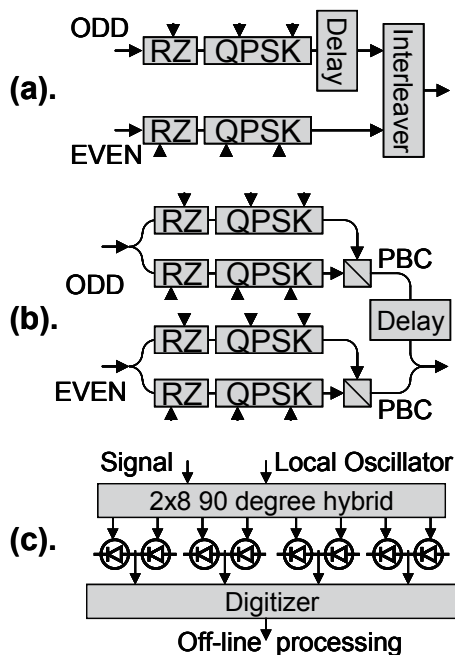


Figure 1: Schematic of single polarization RZ-QPSK transmitter at 23 Gbaud (a), PDM-RZ-QPSK transmitter at 11.5 Gbaud (b), and coherent receiver (c).

40 Gb/s channel is generated by splitting a single wavelength into two modulation paths driven at a symbol rate of 11.5 Gbaud with a quarter word shift in the $2^{23}-1$ PRBS patterns and subsequent

orthogonal optical combining. The symbol rate included 15% FEC overhead. The digital coherent receiver shown in Fig 1c [9] is based on data acquisition with a real time oscilloscope and subsequent off-line post processing [10-11]. The local oscillator operated in a free running mode. Prior to the receiver the channels were separated using another 33 GHz optical interleaving filter as well as a wide-band tunable filter.

The loop test bed consisted of six 100 km amplifier-spans. Each hybrid span had 50 km positive dispersion, large effective area fiber $\sim 135 \mu\text{m}^2$ followed by 50 km of pure silica core fiber. The accumulated dispersion was compensated by placing ~ 9 km DCF modules providing approximately $-2,300$ ps/nm between stages of a 28 nm dual-stage EDFAs (See Figure 2) similar to [12]. Such configuration provided about ~ 1 dB of noise performance advantage relative to regular dispersion managed spans with negative dispersion fiber being a part of the transmission span. The average launch-power into the transmission spans was approximately +20.5 dBm.

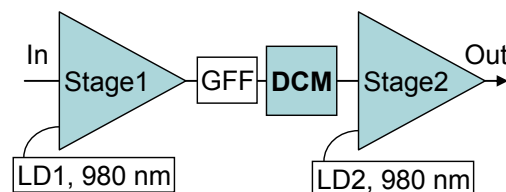


Figure 2: Schematic of the dual-stage EDFA with mid-stage dispersion compensating module DCM.

The transmission line was loaded with CW DFB lasers, and the measurement region was replaced with eight ECL lasers to take advantage of the ECL's narrow line-width and ability to be tuned to arbitrary wavelengths. Among the 8 ECL lasers, the performance of the four center channels was measured and the wavelength of all eight ECL lasers was shifted to the next measurement region [13, 14]. Measurements were performed at different transmission distances ranging from

600 km up to 10,200 km although discussion in this work will be primarily focused on results obtained for 4,200, 7,200 and 10,200 km distances.

3. COHERENT RECEIVER ALGORITHMS

We performed the necessary digital signal processing off-line. The carrier phase estimation (CPE) was performed with a decision feedback algorithm and the Viterbi-Viterbi (the M^{th} power) algorithm [15], respectively, for the QPSK and DC-QPSK schemes. In addition to the absolute phase detection schemes we also investigated the coherent DQPSK scheme that does not require CPE. A constant modulus algorithm (CMA) with 5-taps was used for polarization tracking and PMD compensation. The receiver's dispersion compensation was performed digitally in the off-line processing suite of algorithms.

4. RESULTS

Figure 3 shows the Q-factor as a function of received OSNR measured back-to-back for 23 Gbaud single polarization QPSK and 11.5 Gbaud PDM-DC-QPSK as well as theoretical limits for QPSK and DC-QPSK. Performance of DC-QPSK is ~1 dB lower at low OSNR compared to QPSK. However this difference gradually

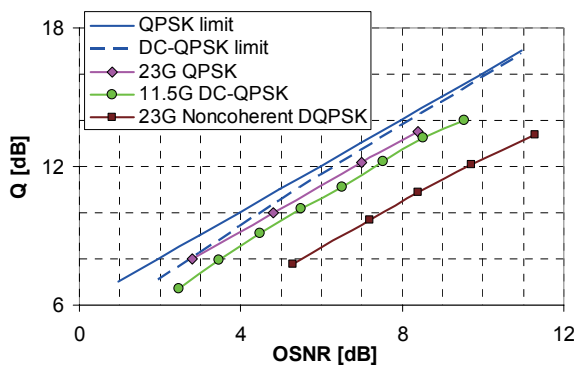


Figure 3: Back-to-back performance (OSNR in 0.4 nm RBW). Theoretical limits for coherent QPSK (solid line) and DC-QPSK (dashed line). Measured QPSK at 23 Gbaud (diamond symbols), DC-QPSK at 11.5 Gbaud dual polarization (round symbols), and noncoherent DQPSK at 23 Gbaud (square symbols).

disappears with the increase of OSNR. Measured performance of both 11.5 and 23 Gbaud rates obtained with and without differential coding is close to theoretical predictions [7]. Performance obtained with noncoherent differential phase detection (DQPSK) is also included for comparison and is more than 2 dB lower than that of coherent detection.

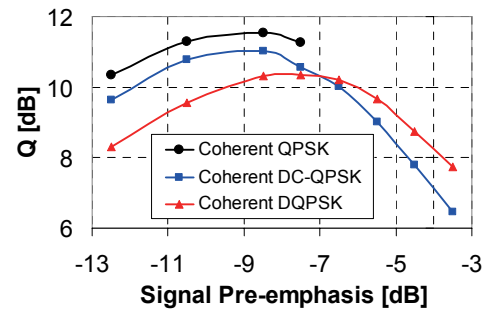


Figure 4: Power pre emphasis sweep for 23 Gbaud single polarization channel at ~1550 nm after 4,200 km distance with coherent QPSK (round symbols), coherent DC-QPSK (square symbols), and coherent DQPSK (triangle symbols).

The coherent QPSK scheme provides the best performance after 4,200 km transmission compared to other schemes (Figure 4). From Figure 4 it also follows that the coherent DQPSK scheme provides a better nonlinear tolerance, which agrees well with previous simulation results [8]. In more nonlinear cases, for example at longer transmission distance, coherent DQPSK can even outperform coherent DC-QPSK. This is shown in Figure 5 for dual polarization 11.5 Gbaud signal. At

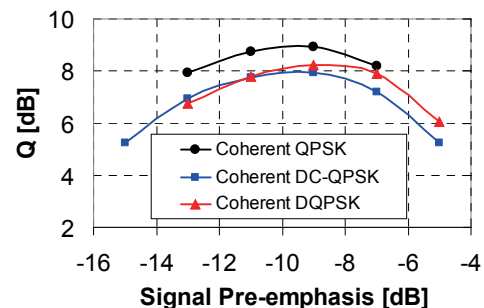


Figure 5: Power pre emphasis sweep for 11.5 Gbaud dual polarization channel after 7,200 km distance with coherent QPSK (round symbols), coherent DC-QPSK (square symbols), and coherent DQPSK (triangle symbols).

high signal powers the coherent QPSK scheme for both 23 and 11.5 Gbaud signals suffers from loss of phase tracking [6].

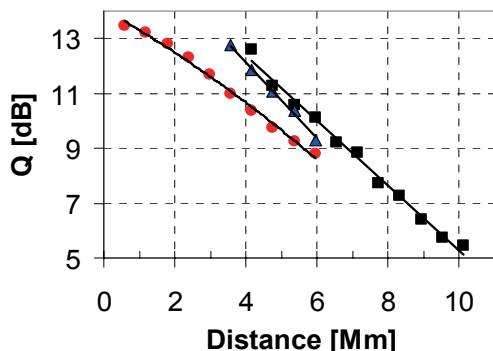


Figure 6: Performance vs. distance for channel at ~1550 nm. Square symbols: 11.5 Gbaud coherent PDM-DC-QPSK; triangles: 23 Gbaud single polarization coherent DC-QPSK; round symbols: 23 Gbaud noncoherent DQPSK.

Figure 6 shows the measured performance after the propagation in the loop testbed as a function of distance. Near 4,200 km coherent detection gave a 2 dB advantage relative to intensity detection. However this benefit reduces as the distance approaches 6,000 km. The coherent PDM-DC-QPSK at 11.5 Gbaud offers the best performance.

Figure 7 shows Q-factor for three groups of channels in PDM-RZ-QPSK experiments at 11.5 Gbaud using the coherent DC-QPSK or coherent DQPSK scheme. At short distance of 4,200 km DC-QPSK outperforms DQPSK, while at

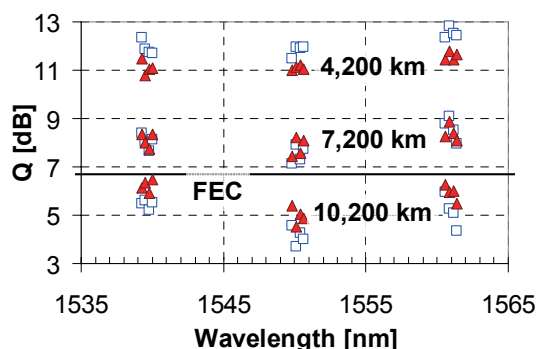


Figure 7: Q-factor after 4,200, 7,200 and 10,200 km distance with coherent DC-QPSK (square symbols) and coherent DQPSK (triangle symbols) for 11.5 Gbaud PDM-QPSK.

10,200 km distance DQPSK provides better performance indicating that it is more tolerant to increased nonlinearity.

5. CONCLUSIONS

We demonstrated back-to-back performance close to theoretical predictions using 10 and 23 Gbaud RZ-QPSK transmitter and coherent receiver. Using 11.5 Gbaud PDM-RZ-QPSK format we show 40 Gb/s transmission over 7,200 km with 120% spectral efficiency and 100 km repeater spacing using a linear dispersion-managed transmission line. The use of either differential phase detection (DQPSK) or differential coding (DC-QPSK) eliminated detrimental effect of phase slips present with absolute phase detection in digital processing and allowed to achieve ~0.7 dB of Q-factor margin on selected groups of channels across the bandwidth.

6. REFERENCES

- [1] G. Charlet, M. Salsi, H. Mardoyan, P. Tran, J. Renaudier, S. Bigo, M. Astruc, P. Sillard, L. Provost, F. Cérou, "Transmission of 81 channels at 40Gbit/s over a Transpacific-Distance Erbium-only Link, using PDM-BPSK Modulation, Coherent Detection, and a new large effective area fibre", ECOC 2008, Brussels, Belgium, Paper Th.3.E.3.
- [2] H. Masuda, E. Yamazaki, A. Sano, T. Yoshimatsu, T. Kobayashi, E. Yoshida, Y. Miyamoto, S. Matsuoka, Y. Takatori, M. Mizoguchi, K. Okada, K. Hagimoto, T. Yamada, and S. Kamei, "13.5-Tb/s (135 x 111-Gb/s/ch) No-Guard-Interval Coherent OFDM Transmission over 6,248 km using SNR Maximized Second-order DRA in the Extended L-band", OFC 2009, San Diego, USA, Paper PDPB5.
- [3] G. Charlet, M. Salsi, P. Tran, M. Bertolini, H. Mardoyan, J. Renaudier, O. Bertran-Pardo, S. Bigo, "72x100Gb/s transmission over transoceanic distance,

using large effective area fiber, hybrid Raman-Erbium amplification and coherent detection”, OFC 2009, San Diego, USA. Paper PDPB6.

[4] S. Chandrasekhar, Xiang Liu, B. Zhu, and D. W. Peckhamet, “Transmission of a 1.2-Tb/s 24-Carrier No-Guard-Interval Coherent OFDM Superchannel over 7200-km of Ultra-Large-Area Fiber”, ECOC 2009, Vienna, Austria, Paper PD2.6.

[5] C. D. Chen, J-M. P. Delavaux, B. W. Hakki, O. Muuhara, T. V. Nguyen, R. J. Nuyts, K. Ogawa, Y. K. Park, C. S. Skolnick, R. E. Tench, J. Thomas, L. D. Tzeng and P. D. Yeates, “A Field Demonstration of 10 Gb/s - 360km Transmission Through Embedded Standard (non-DSF) Fiber Cables”, OFC 1994, San Jose, USA. Paper PD27.

[6] Y. Cai, Dmitri G. Foursa, Jin-Xing Cai, Carl R. Davidson, Oleg Sinkin, Alexei Pilipetskii, Morten Nissov, Neal S. Bergano, “Experimental Study on Broadband Nonlinear Phase Wandering in Coherent Detection Long-Haul Transmissions”, OFC 2010, San Diego, USA. Paper OTuL, To be published.

[7] Y. Cai, “Coherent Detection in Long-Haul Transmission Systems”, OFC 2008, San Diego, USA, Paper OTuM1.

[8] Y. Cai, L. Liu, A. N. Pilipetskii, M. Nissov, and N. S. Bergano, “On Performance of Coherent Phase-Shift-Keying Modulation in 40 Gb/s Long-Haul Optical Fiber Transmission Systems”, OFC 2006, Anaheim, USA, Paper JThB11.

[9] Frowin Derr, “Coherent Optical QPSK Intradyne System: Concept and Digital Receiver Realization”, Journal of Lightwave Technology, vol. 10, No. 9, 1992, Pages 1290-1296.

[10] Michael G. Taylor, “Coherent Detection Method Using DSP for Demodulation of Signal and Subsequent

Equalization of Propagation Impairments” IEEE Photon. Technol. Lett., vol. 16, no. 2, 2004, Pages 674–676.

[11] Kazuro Kikuchi, “Evaluation of Sensitivity of the Digital Coherent Receiver”, Journal of Lightwave Technology, vol. 26, no. 13, 2008, Pages 1817-1822.

[12] J. Renaudier, O. Bertran-Pardo, H. Mardoyan, P. Tran, G. Charlet and S. Bigo, “Performance Comparison of 40G and 100G Coherent PDM-QPSK for Upgrading Dispersion Managed Legacy Systems”, OFC 2009, San Diego, USA, Paper NWD5.

[13] B. Bakhshi, W. W. Patterson, J. Leanza, D. Duff, E. A. Golovchenko, M. Nissov, D. I. Kovsh, M. Vaa, D. Sliwinski, R. L. Maybach, K. Razavi, M. Arend, T. Becker, S. Jimenez, “Optical test equipment for performance evaluation of installed DWDM systems”, OFC 2002, Anaheim, USA, Paper TuY3.

[14] J.-X. Cai, D. G. Foursa, C. R. Davidson, Y. Cai, G. Domagala, H. Li, L. Liu, W. W. Patterson, A. N. Pilipetskii, M. Nissov, and Neal S. Bergano, “A DWDM Demonstration of 3.73 Tb/s over 11,000 km using 373 RZ-DPSK Channels at 10 Gb/s”, OFC 2003, Atlanta, USA, Paper PD22.

[15] A. J. Viterbie and A. M. Viterbie, “Nonlinear estimation of PSK-modulated carrier phase with application to burst digital transmission”, IEEE Transactions on Information Theory, vol. vol. 29, no. 4, 1983, Pages 543-551.